

Medium-speed commercial marine liquid fuel engines

B33:45V PROPULSION

The Bergen B-series is based on a modular design, which gives a flexible platform and at the same time carries forward the Bergen traditional values as a robust and reliable engine.

Proven quality

The selection of technology was done after consulting a broad range of operators, designers and shipbuilders, to establish the qualities they prize in an engine. This engine series was first introduced to the market in 2014 as a diesel engine, and the gas version followed in 2018. It is available in several in-line or Vee cylinder variants for both diesel and gas, and is equally suitable for mechanical transmission or as a marine generating set.

Main benefits for shipyards

- Easy installation
- New resilient mounting (no need of welding brackets)
- Aligned piping at pump-end for easy connection
- Flexible exhaust routing (and air ducting if applicable): 15 degree rotation of connection points to turbocharger available

Main Benefits for ship owners

- Reliable power
- IMO Tier II compliant without use of SCR
- IMO Tier III compliant with use of SCR
- Proven low life cycle costs
- Dynamic service intervals with 25.000 hrs between main services when operating within a defined load window
- Full equipment health monitoring
- Fast load response
- Low vibration/structural noise level
- 24/7 support by global service network
- Compact and modular design with a low weight
- Possible conversion from diesel to gas and vice versa
- New flexible mounts without welded brackets
- Aligned piping at pump end for ease of connection
- Flexible exhaust routing – 15 degree rotation of connections to turbocharger
- Full power can be taken from either end of crankshaft up to and including V12 version


Technical data

Engine type		B33:45V12P	B33:45V16P
Number of cylinders		12	16
Engine speed	r/min	750	750
Mean piston speed	m/s	11.2	11.2
Max.cont rating (MCR)	kW	7200	9600
Mean effective pressure (BMEP)	bar	25	25
Specific fuel oil consumption (SFOC)	g/kWh*	from 171	from 171
SFOC with engine driven pumps	g/kWh	from 173	from 173
Specific lubricating oil consumption	g/kWh	0.5	0.5
Cooling water temp. engine outlet	°C	90	90

Engine ratings are according to ISO 3046/1. The above figures are based on conditions at maximum 45°C ambient air temperature and maximum 32°C sea water temperature.

*SFOC is based on MDO with a net calorific value of 42.7 MJ/kg and no engine driven pumps.

Note: Due to continuous development, some data may be changed without notice.

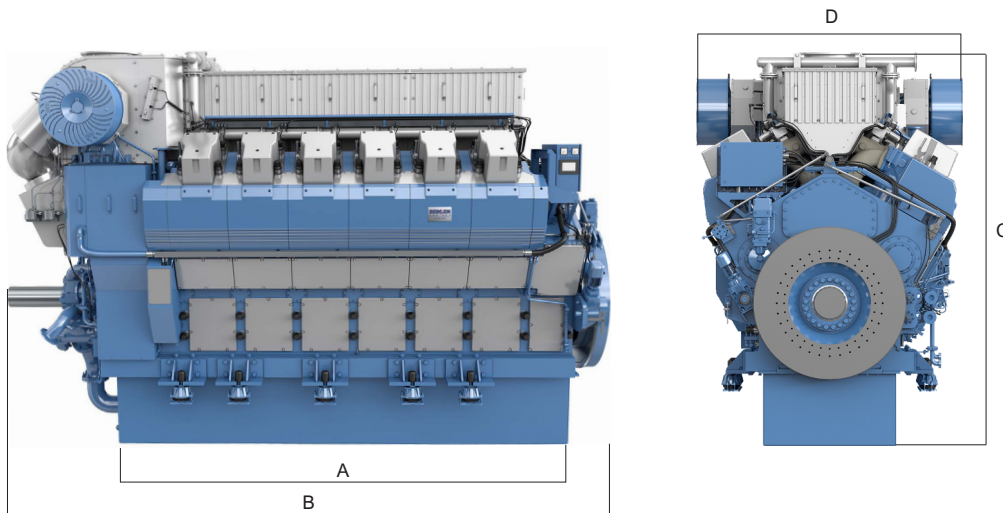

Principal dimensions

Cylinder dia. 330 mm. Piston stroke 450 mm. All dimensions in mm.

ENGINE TYPE	A	B	C	D	WEIGHT DRY ENGINE
B33:45V12P	5410	6867	4544	3138	74300 kg
B33:45V16P	6643	8104	4544	3657	99715 kg

Weight dry engine excludes transport foundation.