


B36:45V

Direct Propulsion
Natural Gas
7,200 - 9,600 kW

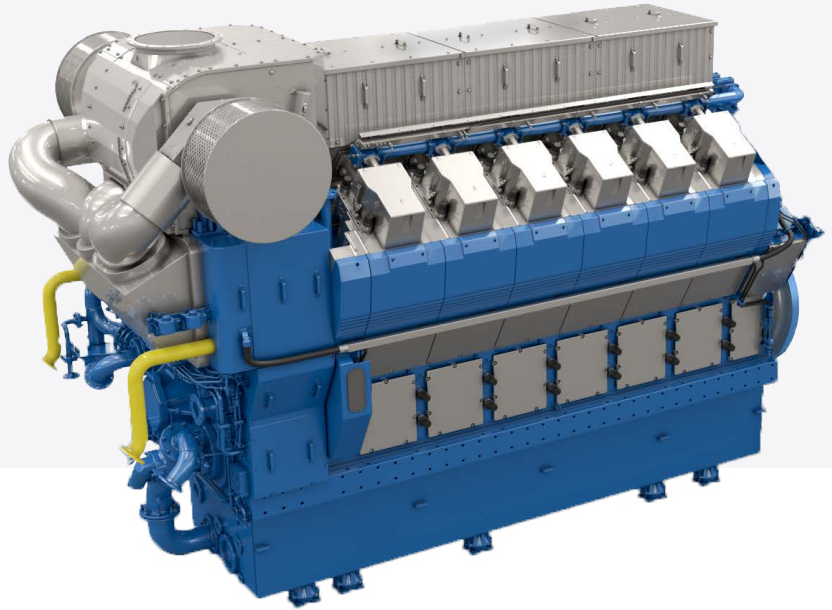

Modular Design for Maximum Versatility

Bergen's B-series, rooted in a modular design, epitomizes adaptability, catering specifically to the demands of the marine market. Crafted following extensive consultation with marine operators, designers, and shipbuilders, this series debuted in 2014 with a diesel version, later complemented by a gas iteration in 2018. Offering a range of configurations, including inline or V-cylinder variants, the B36:45 seamlessly integrates into marine propulsion systems and auxiliary power generation setups.

Pioneering Efficiency for Maritime Solutions

Bergen's latest B36:45V engine, honed through decades of maritime expertise, redefines efficiency for marine applications. Engineered in collaboration with marine stakeholders and service experts, it introduces advanced features such as Cylinder Pressure Monitoring (CPM) for precise load control, Variable Valve Timing (VVT) for optimized response, and a wastegate turbocharger ensuring optimized fuel-to-air ratios at varying ambient conditions for lean-burn operation.

For ship owners, the B36:45V engine boasts remarkably low emissions of NOx, CO2, SOx, and particulates. Featuring no smoke emissions and equipped with double-wall piping, vessels equipped with Bergen's technology ensure cleaner engine rooms and provide operators with enhanced safety against gas-related hazards.

Key Benefits for Shipyards

- Easy Installation
- Resilient Mounting - No need for welding brackets
- Aligned Piping at Pump-End for Easy Connection
- IMO Tier III Compliant without SCR
- Single Fuel = Single Bunkering
- Fast Load Response
- Low Methane Slip at all Engine Loads
- Convertible to Liquid Fuel Operation with Bergen's B3X Platform

Product Range


B36:45V Direct Propulsion
Max Cont Rating (kW)





Weight & Dimensions

	Weight (kg, dry)	Length of Foundation (mm)	Length of Engine (mm)	Width (mm)	Height (mm)
B36:45V12 P	71,900	5,365	6,960	3,280	4,600
B36:45V16 P	97,000	6,645	8,705	3,750	4,730

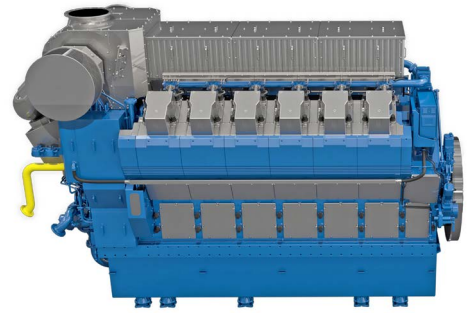

Technical Data

	B36:45V12 P	B36:45V16 P
Number of Cylinders	12	16
Engine Speed (r/min)	750	750
Mean Piston Speed (m/s)	11.2	11.2
Max. Cont Rating (MCR, kW)	7,200	9,600
Max. Cont Rating (BHP metric)	9,790	13,050
Mean Effective Pressure (BMEP, bar)	20.96	20.96
Specific Lub Oil Consumption (g/kWh)	7,370	7,350
Specific Fuel Consumption (g/kWh)	0.3	0.3
Cooling Water Temp. Engine Outlet (°C)	90	90

Stroke Ratio

	B36:45V
Cylinder Diameter (mm)	360
Piston Stroke (mm)	450
Ratio	0.8

GENERAL CONDITIONS

- All technical data is valid for 100% load.
- Engine power definition is according to ISO 3046-1
- Specific fuel consumption is measured on testbed according to iso 3046-1, running on Natural Gas with a lower heating value of 36 MJ/m³n and no engine driven pumps.
- Methane no Min 70, According to AVL calculation.
- Specific lub. Oil consumption is for guidance only.

DISCLAIMER

- Due to continuous development, some data may change. The information does not carry any contractual value.

Sustainability

Future Fuels

Our customers are making long-term investments when planning their next project, yet uncertainties loom regarding future fuel availability, costs, and regulatory landscapes, including potential CO₂ taxes. That's why Bergen Engines' modular design prioritizes fuel flexibility, enabling customers to navigate these uncertainties with confidence.

This flexibility ensures reliability and top efficiency ratings for our engines, regardless of the fuel type you choose to operate with today, providing peace of mind and longevity to your investments.

Learn more about our ongoing research with Hydrogen, Methanol, Biofuels and Ammonia.

