




Generator Set Natural Gas 1,460 - 2,430 kW



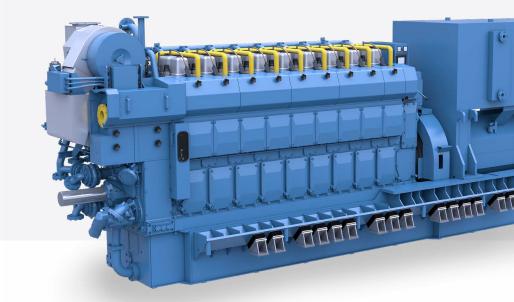

Power and Reliability


Bergen's C26:33L Generator Set

The C26:33L is a time-tested powerhouse renowned for its unmatched reliability and performance. With a legacy spanning decades, this engine boasts a modularized design, featuring Bergen Engines' signature Power Pack unit. This innovative construction, comprising a cylinder head, liner, piston, and three-piece connecting rod, streamlines the maintenance process, making it both easy and cost-effective. What's more, the engine's Variable Valve Timing ensures optimal efficiency and exceptional transient performance, even during part-load operation. With low emissions and proven cost-effectiveness, the Bergen C26:33L stands as a testament to cutting-edge engineering and unwavering reliability.


Compact yet robust, the Bergen C26:33L engine offers a trifecta of power, reliability, and efficiency. Experience world-leading fast load response and stable frequency, coupled with silent resilient mounting for enhanced operational comfort. Its competitive fuel and lubricating oil consumption ensure economical operation without compromising performance. Plus, with features like no fuel leakage to the lubricating oil system and the option for a single-bearing alternator, this engine sets a new standard for power-to-weight ratio in its class.

Key Benefits for Shipyards

- Exceptionally low emissions of NOx, CO2, SOx and particulates
- IMO tier III compliant without SCR
- Optimum response at all engine load points (Variable Turbo Geometry)
- Super silent
 resilient mounting
- Stable frequency
- 24/7 support

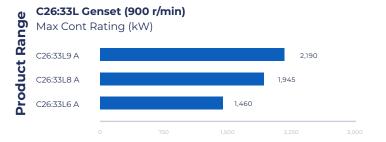


C26:33L Genset (1000 r/min) Max Cont Rating (kW)





Weight & Dimensions

	Weight (kg, dry)	Length of Engine (mm)	Width (mm)	Height (mm)
C26:33L6 A	25,090	4,480	1,945	3,530
C26:33L8 A	31,425	5,140	2,100	3,520
C26:33L9 A	37,870	5,695	2,180	3,565



Technical Data

900 r/min

	C26:33L6 P	C26:33L8 P	C26:33L9 P	C26:33L6 P	C26:33L8 P	C26:33L9 P
Number of Cylinders	6	8	9	6	8	9
Engine Speed (r/min)	900	900	900	1,000	1,000	1,000
Mean Piston Speed (m/s)	9.9	9.9	9.9	11	11	11
Max. Cont Rating (MCR, kW)	1,460	1,945	2,190	1,620	2,160	2,430
Max. Cont Rating altern, h=0.97 (kWel)	1,415	1,885	2,125	1,570	2,095	2,355
Max. Cont Rating altern, Cosf=0.8 (kVa)	1,770	2,355	2,655	1,965	2,620	2,945
Mean Effective Pressure (BMEP, bar)	18.5	18.5	18.5	18.5	18.5	18.5
Specific Energy Consumption (kJ/kWh)	7,550	7,550	7,550	7,550	7,550	7,550
Specific Lub Oil Consumption (g/kWh)	0.4	0.4	0.4	0.4	0.4	0.4
Cooling Water Temp. Engine Outlet (*C)	90	90	90	90	90	90

Stroke Ratio

	C26:33L
Cylinder Diameter (mm)	260
Piston Stroke (mm)	330
Ratio	0.79

GENERAL CONDITIONS

All technical data is valid for 100% load.

1000 r/min

- Engine power definition is according to ISO 3046-1
- Specific fuel consumption is measured on testbed according to iso 3046-1, running on Natural Gas with a lower heating value of 36 MJ/m3n and no engine driven pumps.
- Methane no Min 70, Aaccording to AVL calculation.
- Specific lub. Oil consumption is for guidance only.

DISCLAIMER

Due to continuous development, some data may change. The information does not carry any contractual value.

Sustainability

Future Fuels

Our customers are making long-term investments when planning their next project, yet uncertainties loom regarding future fuel availability, costs, and regulatory landscapes, including potential CO2 taxes. That's why Bergen Engines' modular design prioritizes fuel flexibility, enabling customers to navigate these uncertainties with confidence.

This flexibility ensures reliability and top efficiency ratings for our engines, regardless of the fuel type you choose to operate with today, providing peace of mind and longevity to your investments.



Learn more about our ongoing research with Hydrogen, Methanol,